

主流款
Normally used machine

同类替代款
OPTION MACHINE

VISLON ZIPPER O/E PRODUCTION LINE MACHINE

JX-2013S
全自动塑钢拉链
射出成型机
Automatic plastic zipper
injection molding machine



JX-2000S-S
塑钢冲齿机
vislon zipper
gapping machine



JX-6001
塑钢拉链压胶
打孔一体机
vislon zipper file
sealing & hole
punching machine



JX-2002C-S
超声波冲孔机
vislon zipper ultrasonic Hole
punching machine



JX-2012Q
全自动开口注塑机
fully automatic open end
pin & box machine



JX-2014
粉碎机
grinder



JX-6001
排味模
Teeth mode



JX-2001S
全自动塑钢双内贴布机
ultrasonic vislon zipper film
sealing machine



JX-2012Q
全自动闭口注塑机
fully automatic closed end
bottom stopper machine



JX-2002-S
超声波冲孔机
vislon zipper ultrasonic Hole
punching machine



JX-2020-S
全自动塑钢拉链
摘料拼链机
Full automatic plastic
steel zipper stripping and
chain splicing machine




JX-2005K-J
普通开口切断机
带机械手
Ordinary cutting machine
with manipulator



JX-2018S-D
全自动穿头机
(各形状拉头)
automatic fancy slider
wearing machine



JX-2005K-C
超声波开口切断机
带机械手
ultrasonic open end
zipper cutting machine



JX-2018S
全自动穿头机
(普通拉头)
automatic slider wearing
machine(normal slider)




全自动塑钢拉链射出成型机 Automatic plastic zipper injection molding machine

型号:	ITEM NO:	JX-2013S
功率:	POWER:	7.0KW
注射速度:	SPEED:	13~15shot/min
电压:	VOLTAGE:	380/440V
螺杆直径:	Screw diameter	32 mm
最大注塑量:	Maximum injection quantity	100g
加料工作温度:	Feeding working temperature	170-250 °C
料筒容量:	Barrel capacity	25kgs
锁模力:	Clamping force	25trons
机器重量:	MACHINE Weight:	1.35trons
机器尺寸:	MACHINE SIZE:	2.50*0.85*2.60m
装箱尺寸:	Packaging Size:	1.50*0.75*2.55m

机器特点:
本机为塑钢拉链专用排味设备,该设备排味整齐,接缝间隙均匀,味牙饱满,稳定性高。

Machine features:
This machine is a special microphone discharge device for plastic steel zippers. The microphone discharge of this device is neat, the seam gap is even, the microphone teeth are full, and the stability is high.

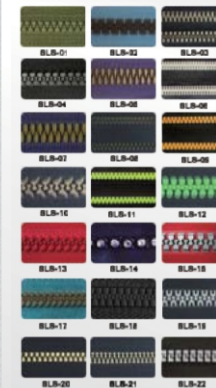


全自动塑钢拉链射出成型机
Automatic plastic zipper injection molding machine

排味模 Teeth mode

型号:	ITEM NO:	JXM-01
材料:	Material:	P20,H13
重量:	Weight:	20kgs

模具特点:
该模具为塑钢排味专用模具,味牙饱满整齐,长久耐用。

Machine features:
This mold is a special mold for plastic steel microphone row. The microphone teeth are full and neat, and it is durable

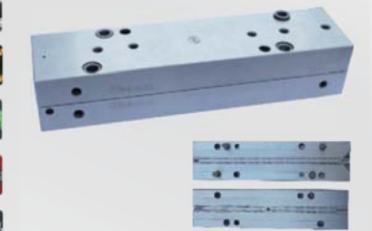


排味模
Teeth mode

粉碎机 grinder

型号:	ITEM NO:	JX-2014
功率:	POWER:	0.75KW
电压:	VOLTAGE:	220V
机器重量:	MACHINE Weight:	85kgs
机器尺寸:	MACHINE SIZE:	0.70*0.50*0.75m
装箱尺寸:	Packaging Size:	0.72*0.55*0.80m

机器特点:
该机为塑钢拉链射出成型机配套机器,粉碎回收余料,粉碎颗粒大小均匀,易二次使用。

Machine features:
This machine is a matching machine for plastic steel zipper injection molding machine. It can crush and recover surplus materials, and the size of crushed particles is uniform, which is easy to be used again.

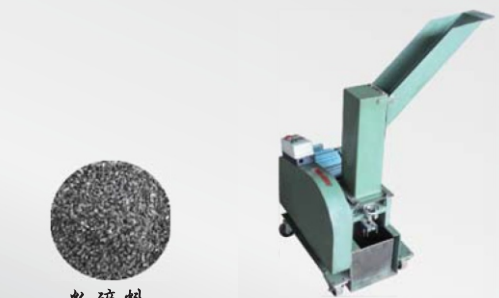


粉碎料
Crushing material

粉碎机
grinder



塑钢拉链冲齿机
vislon zipper gapping machine

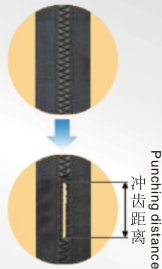

Punching distance
冲齿距离

塑钢拉链冲齿机

vislon zipper gapping machine

型号:	ITEM NO:	JX-2000S-S
功率:	POWER:	1.0KW
注射速度:	SPEED:	1600pcs/H,拉链长60mm
电压:	VOLTAGE:	380V
机器重量:	MACHINE Weight:	270Kgs
机器尺寸:	MACHINE SIZE:	1.60*0.65*1.85m
装箱尺寸:	Packaging Size:	1.00*0.75*1.60m

机器特点:

本机采用PLC控制系统,触摸屏控制全程控制,自动检测故障,操作方便,无需人工修齿,节省劳动力,提高效率。

Machine features:

This machine adopts PLC control system and touch screen control for the whole process. It has its own fault detection system, which is easy to operate without manual gear repair, saving labor and improving efficiency.

超声波冲孔机

vislon zipper ultrasonic Hole punching machine


型号:	ITEM NO:	JX-2002C-S
功率:	POWER:	1.65KW
注射速度:	SPEED:	1800pcs/H,拉链长60mm
电压:	VOLTAGE:	220V
机器重量:	MACHINE Weight:	120Kgs
机器尺寸:	MACHINE SIZE:	1.50*0.65*1.95m
装箱尺寸:	Packaging Size:	0.80*0.70*1.65m

机器特点:

本机采用超声波融孔,融孔平整,不起边,边缘强度高,有效提高后续方块插销注塑的结合力,保证拉链质量,提高工人效率。

Machine features:

The machine adopts ultrasonic hole melting, hole melting certificate, no edge, high edge strength, which effectively improves the binding force of subsequent block bolt injection molding, ensures the quality of zipper, and improves worker efficiency.

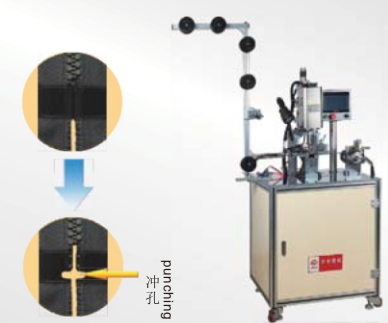

超声波冲孔机
vislon zipper ultrasonic Hole punching machine



塑钢拉链压胶打孔一体机
vislon zipper gapping machine



Double sided patching
双面贴布
punching
冲孔

塑钢拉链压胶打孔一体机

vislon zipper gapping machine

型号:	ITEM NO:	JX-6001
功率:	POWER:	2.0KW
注射速度:	SPEED:	1600pcs/H,拉链长60mm
电压:	VOLTAGE:	380V
机器重量:	MACHINE Weight:	300Kgs
机器尺寸:	MACHINE SIZE:	2.40*0.65*1.85m
装箱尺寸:	Packaging Size:	1.70*0.75*1.65m

机器特点:

本机将压胶冲孔两步工序一机完成,避免半成品拉链在单独机台加工中产生损坏,同时保证拉链质量,节省操作空间,提高工人效率。

Machine features:

This machine completes the two steps of pressing and punching in one machine, avoiding the damage of semi-finished zippers in separate machine processing, while ensuring the quality of zippers, saving operation space and improving worker efficiency.

超声波冲孔机

vislon zipper ultrasonic Hole punching machine


型号:	ITEM NO:	JX-2002S
功率:	POWER:	0.50KW
注射速度:	SPEED:	1800pcs/H,拉链长60mm
电压:	VOLTAGE:	220V
机器重量:	MACHINE Weight:	85Kgs
机器尺寸:	MACHINE SIZE:	1.10*0.55*1.45m
装箱尺寸:	Packaging Size:	0.65*0.65*1.40m

机器特点:

本机采用全自动冲孔系统,定位准确,冲孔清晰,同时模具更换方便,操作简单,节省劳动力,提高效率。

Machine features:


This machine adopts automatic punching system, with accurate positioning and clear punching. It is convenient to replace the mold, simple operation, labor saving and efficiency improvement.

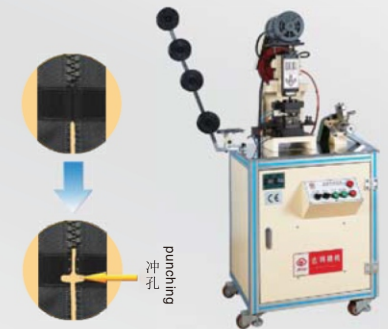

超声波冲孔机
vislon zipper ultrasonic Hole punching machine



全自动塑钢双内贴布机
ultrasonic vislon zipper film sealing machine

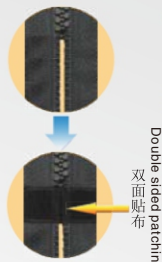

Double sided patching
双面贴布

全自动塑钢双内贴布机

ultrasonic vislon zipper film sealing machine

型号:	ITEM NO:	JX-2001S
功率:	POWER:	1.50KW
注射速度:	SPEED:	1600pcs/H,拉链长60mm
电压:	VOLTAGE:	220V
机器重量:	MACHINE Weight:	200Kgs
机器尺寸:	MACHINE SIZE:	1.65*0.65*1.80m
装箱尺寸:	Packaging Size:	1.00*0.70*1.50m

机器特点:

本机采用高端超声波控制系统,胶布粘合度强,工作稳定,操作简单,有效提高工人效率。

Machine features:

This machine adopts high-end ultrasonic control system, with strong adhesive tape, stable operation, simple operation, and effective improvement of worker efficiency.

全自动开口注塑机

fully automatic open end pin & box machine


型号:	ITEM NO:	JX-2012Q-J
功率:	POWER:	4.00KW
平均产量:	Average output:	1000pcs/H,拉链长60mm
螺杆直径:	Screw diameter:	25mm
标准射出量:	Standard output:	80g
电压:	VOLTAGE:	380V
机器重量:	MACHINE Weight:	950Kgs
机器尺寸:	MACHINE SIZE:	2.00*0.70*2.20m
装箱尺寸:	Packaging Size:	1.35*0.70*2.15m

机器特点:


本机适用于尼龙拉链树脂开口拉链,将方块插销和上止注塑于拉链上,适用带拉头或无拉头拉链,方块插销结合力强,人工效率高,适用范围广。

Machine features:


This machine is suitable for nylon zippers and resin zippers. It injects block latches and upper stops onto zippers. It is suitable for zippers with or without pull heads. The block latches have strong binding force, high labor efficiency and wide application range.

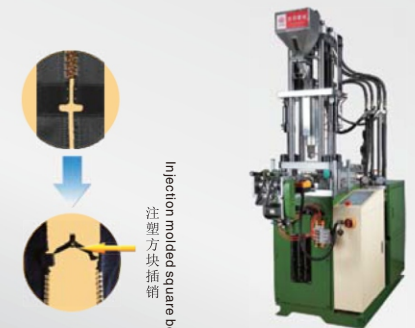


全自动开口注塑机
fully automatic open end pin & box machine

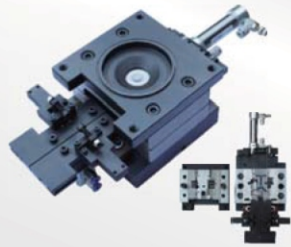

方块插口开口模
Injection mode for pin & box



注塑方块插销
Injection molded square bolt



方块插销开口模

Injection mode for pin & box

型号:	ITEM NO:	JXM-02
材料:	Material:	P20,H13
重量:	Weight:	10kgs

机器特点:

此模具是全自动开口注塑机的配套模具, 注塑单方块插口或方块插口上至, 结合力好, 质量稳定.

Machine features:

This mold is the supporting mold of the fully automatic opening injection molding machine. The injection molding single square socket or square socket goes up, with good adhesion and stable quality.

全自动穿头机(普通拉头)

automatic slider wearing machine(normal slider)


型号:	ITEM NO:	JX-2002S
功率:	POWER:	0.75KW
注射速度:	SPEED:	1600pcs/H,拉链长60mm
电压:	VOLTAGE:	380V
机器重量:	MACHINE Weight:	245Kgs
机器尺寸:	MACHINE SIZE:	1.30*0.55*1.75m
装箱尺寸:	Packaging Size:	0.75*0.60*1.60m

机器特点:

本机适用普通拉头套入开口或闭口拉链中, 工作速度快, 全自动操作, 自动检测故障, 操作方便, 节省劳动力, 提高效率.

Machine features:

This machine is suitable for ordinary pullers to be sleeved into open or closed zippers, with fast working speed, fully automatic operation, automatic fault detection, convenient operation, labor saving and efficiency improvement.

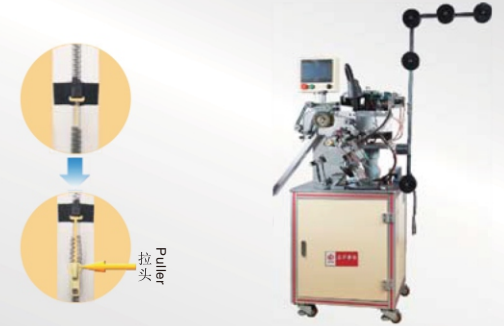

全自动穿头机(普通拉头)
automatic slider wearing machine(normal slider)



全自动塑钢拉链摘料拼链机
Full automatic plastic steel zipper stripping and chain splicing machine



摘料拼链
Picking and chain splicing



全自动塑钢拉链摘料拼链机

Full automatic plastic steel zipper stripping and chain splicing machine

型号:	ITEM NO:	JX-2002S
功率:	POWER:	0.75KW
平均产量:	Average output:	1600pcs/H,拉链长60mm
电压:	VOLTAGE:	220V
机器重量:	MACHINE Weight:	245Kgs
机器尺寸:	MACHINE SIZE:	1.60*0.50*1.90m
装箱尺寸:	Packaging Size:	0.70*0.70*1.40m

机器特点:

本机是专业研发用于塑钢开口拉链自动摘料和拼链的设备, 实现全自动摘除开口注塑机后产生的废料, 改进工艺流程, 解决了需要人工手动穿拉头的缺点, 节省劳动力, 提高效率.

Machine features:

This machine is a professional R&D equipment used for automatic stripping and chain splicing of plastic steel opening zippers. It realizes the full automatic removal of the leftovers generated after the opening injection molding machine, improves the process flow, solves the shortcomings of manual threading and pulling, saves labor and improves efficiency.

全自动闭口注塑机

fully automatic closed end bottom stopper machine


型号:	ITEM NO:	JX-2012Q
功率:	POWER:	4.00KW
平均产量:	Average output:	1000pcs/H,拉链长60mm
螺杆直径:	Screw diameter:	25mm
标准射出量:	Standard output:	80g
电压:	VOLTAGE:	380V
机器重量:	MACHINE Weight:	950Kgs
机器尺寸:	MACHINE SIZE:	2.10*0.70*2.20m
装箱尺寸:	Packaging Size:	1.35*0.70*2.15m

机器特点:

本机适用于闭口塑钢拉链的上下止注塑, 能适用不同模具, PLC控制, 更换方便, 操作简单, 在保证拉链质量, 节省操作空间, 提高工人效率.

Machine features:


This machine is applicable to the up and down stop injection molding of closed plastic steel zippers. It can be applied to different molds. PLC control makes it easy to replace and operate. It can ensure the quality of zippers, save operation space and improve worker efficiency.

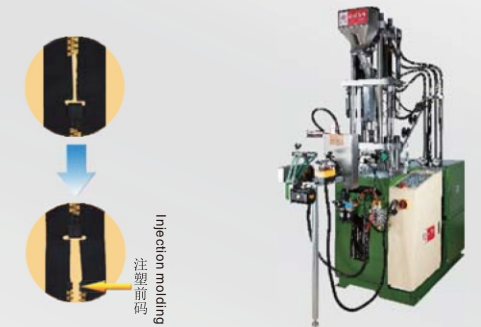

全自动闭口注塑机
fully automatic closed end bottom stopper machine



全自动穿头机(各形状拉头)
automatic fancy slider wearing machine



拉头
Puller



全自动穿头机(各形状拉头)

automatic fancy slider wearing machine

型号:	ITEM NO:	JX-2018S-D
功率:	POWER:	0.75KW
注射速度:	SPEED:	1600pcs/H,拉链长60mm
电压:	VOLTAGE:	380V
机器重量:	MACHINE Weight:	245Kgs
机器尺寸:	MACHINE SIZE:	1.40*0.55*1.75m
装箱尺寸:	Packaging Size:	0.75*0.60*1.60m

机器特点:

本机能将不同形状的拉头套入开口或闭口拉链中, 全程自动, 操作方便, 自动检测故障, 工作稳定, 节省劳动力, 提高效率.

Machine features:

This machine can insert different forms of pull heads into open or closed zippers. It is automatic in the whole process, convenient in operation, automatic in fault detection, stable in work, labor saving and efficiency improvement.

箭码闭口模

Closed end mode


型号:	ITEM NO:	JXM-03
材料:	Material:	P20,H13
重量:	Weight:	10kgs

机器特点:

此模具是全自动开口注塑机的配套模具, 注塑单方块插口或方块插口上至, 结合力好, 质量稳定.

Machine features:


This mold is a supporting mold for fully automatic opening injection molding. The injection molding single square socket or square socket goes up to. Good adhesion and stable quality



注塑前模
Injection molding front



闭口模
Closed end mode

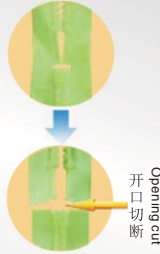

Opening cut
开口切断

普通开口切断机带机械手

Ordinary cutting machine with manipulator

型号:	ITEM NO:	JX-2005K-J
功率:	POWER:	0.75KW
注射速度:	SPEED:	1600pcs/H,拉链长60mm
电压:	VOLTAGE:	220V
机器重量:	MACHINE Weight:	245Kgs
机器尺寸:	MACHINE SIZE:	2.15*0.55*1.75m
装箱尺寸:	Packaging Size:	0.80*0.60*1.50m

机器特点:


本机采用机械手控制拉带速度,可以适用于各种形状的拉片通过模具,钩针定位,拉链切口平整,操作方便,提高效率.

Machine features:

The machine uses a manipulator to control the speed of the belt, which can be used for pulling pieces of various shapes through the mold, positioning the crochet, making the zipper cut smooth, easy to operate, and improving the efficiency.

普通切断机带机械手

Ordinary cutting machine with manipulator

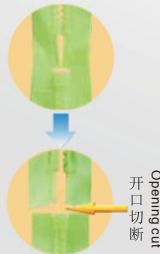

Opening cut
开口切断

超声波开口切断机带机械手

ultrasonic open end zipper cutting machine

型号:	ITEM NO:	JX-2005K-C
功率:	POWER:	0.75KW
注射速度:	SPEED:	1600pcs/H,拉链长60mm
电压:	VOLTAGE:	380V
机器重量:	MACHINE Weight:	245Kgs
机器尺寸:	MACHINE SIZE:	2.15*0.85*1.90m
装箱尺寸:	Packaging Size:	1.00*0.70*1.70m

机器特点:

本机采用机械手控制拉带速度,超声波热熔原理来切断,切口平整,不起边,结合处牢固,可以适用于各种形状的拉片通过模具,钩针定位,拉链切口平整,操作方便,提高效率.

Machine features:

This machine uses a manipulator to control the speed of the belt, and the ultrasonic hot melting principle to cut. The cut is flat, without edges, and the joint is firm. It can be used for pulling pieces of various shapes through the mold, crochet positioning, zipper cut is flat, easy to operate, and improve efficiency.


超声波切断机带机械手

ultrasonic open end zipper cutting machine

VISLON ZIPPER C/E PRODUCTION LINE MACHINE

 主流款
Normally used machine

 同类替代款
OPTION MACHINE

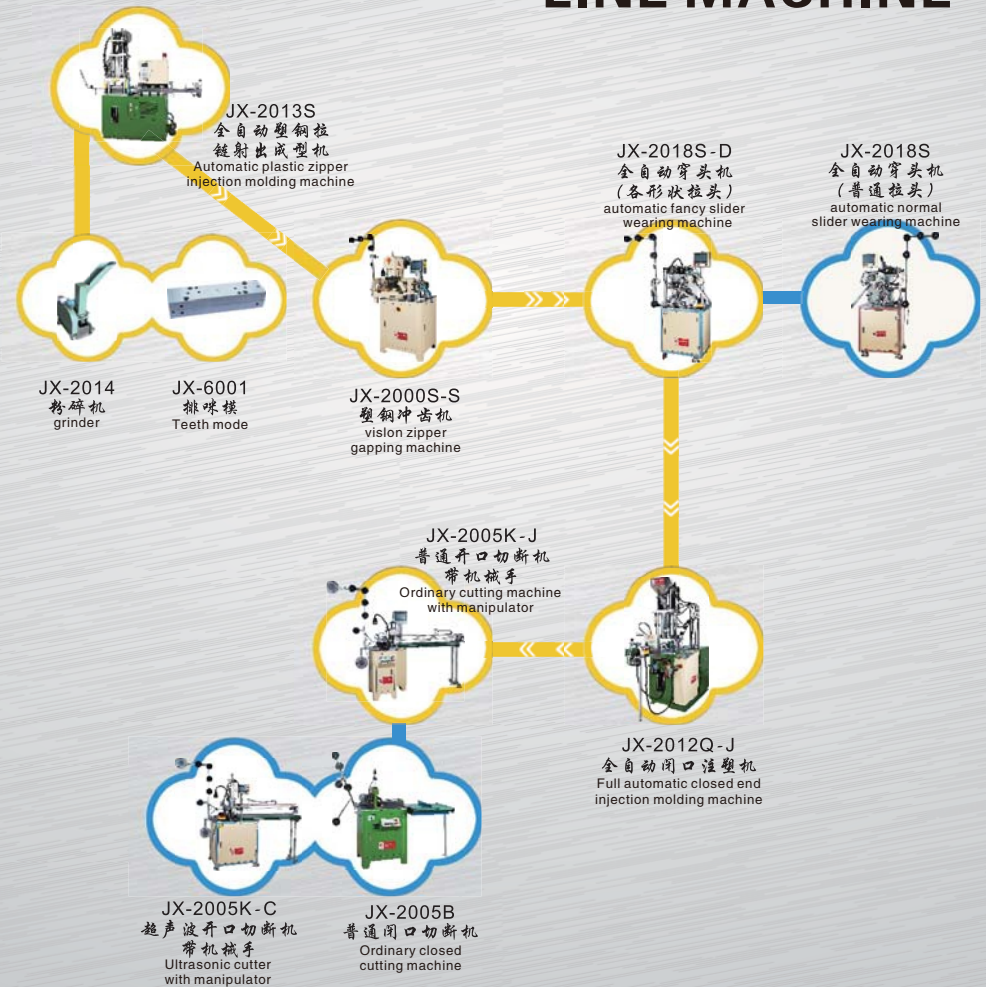



全自动塑钢拉链射出成型机
Automatic plastic zipper injection molding machine




全自动塑钢拉链射出成型机 Automatic plastic zipper injection molding machine

型号:	ITEM NO:	JX-2013S
功率:	POWER:	7.0KW
注射速度:	SPEED:	13~15shot/min
电压:	VOLTAGE:	380/440V
螺杆直径:	Screw diameter	32 mm
最大注射量:	Maximum injection quantity	100g
加料工作温度:	Feeding working temperature	170-250 °C
料筒容量:	Barrel capacity	25kgs
锁模力:	Clamping force	25tons
机器重量:	MACHINE Weight:	1.35tons
机器尺寸:	MACHINE SIZE:	2.50*0.85*2.60m
装箱尺寸:	Packaging Size:	1.50*0.75*2.55m

机器特点:
该机为塑钢拉链专用排齿设备,该设备排齿整齐,接缝间隙均匀,齿牙饱满,稳定

Machine features:
This machine is a special microphone discharge equipment for plastic steel zippers. The microphone discharge of this equipment is neat, the seam gap is even, and the microphone teeth are full and stable.

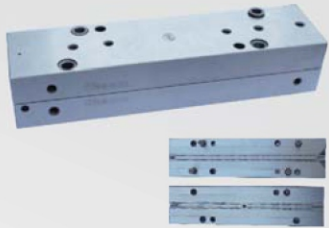

排齿模
Teeth mode



排齿模 Teeth mode

型号:	ITEM NO:	JXM-01
材料:	Material:	P20,H13
重量:	Weight:	20kgs

模具特点:
该模具为塑钢排齿专用模具,齿牙饱满整齐,长久耐用。

Machine features:
This mold is a special mold for plastic steel microphone row. The microphone teeth are full and neat, and it is durable.



粉碎机
grinder



粉碎料
Crushing material

粉碎机 grinder

型号:	ITEM NO:	JX-2014
功率:	POWER:	0.75KW
电压:	VOLTAGE:	220V
机器重量:	MACHINE Weight:	85kgs
机器尺寸:	MACHINE SIZE:	0.70*0.50*0.75m
装箱尺寸:	Packaging Size:	0.72*0.55*0.80m

机器特点:
该机为塑钢拉链射出成型机配套机器,粉碎回收余料,粉碎颗粒大小均匀,易二次使用。


Machine features:
This machine is a matching machine for plastic steel zipper injection molding machine to crush and recover surplus materials. The size of crushed particles is uniform and it is easy to be used again.

塑钢拉链冲齿机 vislon zipper gapping machine

型号:	ITEM NO:	JX-2000S-S
功率:	POWER:	1.0KW
注射速度:	SPEED:	1600pcs/H,拉绳长60mm
电压:	VOLTAGE:	380V
机器重量:	MACHINE Weight:	270Kgs
机器尺寸:	MACHINE SIZE:	1.60*0.65*1.85m
装箱尺寸:	Packaging Size:	1.00*0.75*1.60m

机器特点:
本机采用PLC控制系统,触摸屏控制全程控制,自动检测故障,操作方便,无需人工修齿,节省劳动力,提高效率。

Machine features:
This machine adopts PLC control system, touch screen control whole process control, automatic fault detection, convenient operation, no manual gear repair, labor saving and efficiency improvement.

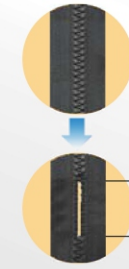

冲齿距离



塑钢拉链冲齿机
vislon zipper gapping machine

全自动穿头机(各形状拉头) automatic fancy slider wearing machine

型号:	ITEM NO:	JX-2018S-D
功率:	POWER:	0.75KW
注射速度:	SPEED:	1600pcs/H,拉绳长60mm
电压:	VOLTAGE:	380V
机器重量:	MACHINE Weight:	245Kgs
机器尺寸:	MACHINE SIZE:	1.40*0.55*1.75m
装箱尺寸:	Packaging Size:	0.75*0.60*1.60m

机器特点:
本机能将不同形状的拉头套入开口或闭口拉链中,全程自动,操作方便,自动检测故障,工作稳定,节省劳动力,提高效率。

Machine features:
This machine can cover the pull heads of different shapes into the open or closed zippers. It is automatic in the whole process, convenient in operation, automatic in fault detection, stable in work, labor saving and efficiency improving.



拉头
Puller



全自动穿头机(各形状拉头)
automatic fancy slider wearing machine

全自动穿头机(普通拉头) automatic normal slider wearing machine

型号:	ITEM NO:	JX-2002S
功率:	POWER:	0.75KW
注射速度:	SPEED:	1600pcs/H,拉绳长60mm
电压:	VOLTAGE:	380V
机器重量:	MACHINE Weight:	245Kgs
机器尺寸:	MACHINE SIZE:	1.30*0.55*1.75m
装箱尺寸:	Packaging Size:	0.75*0.60*1.60m

机器特点:
本机适用普通拉头套入开口或闭口拉链中,工作速度快,全自动操作,自动检测故障,操作方便,节省劳动力,提高效率。

Machine features:
This machine is suitable for ordinary pullers to be sleeved into open or closed zippers, with fast working speed, fully automatic operation, automatic fault detection, convenient operation, labor saving and efficiency improvement.




拉头
Puller



全自动穿头机(普通拉头)
automatic normal slider wearing machine



全自动闭口注塑机
Full automatic closed end injection molding machine

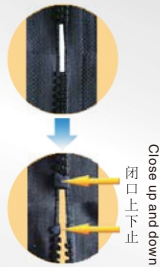

闭口上下止

全自动闭口注塑机


Full automatic closed end injection molding machine

型号:	ITEM NO:	JX-2012Q
功率:	POWER:	4.00KW
平均产量:	Average output:	1000pcs/H,拉链长60mm
螺杆直径:	Screw diameter:	25mm
标准射出量:	Standard output:	80g
电压:	VOLTAGE:	380V
机器重量:	MACHINE Weight:	950Kgs
机器尺寸:	MACHINE SIZE:	2.10*0.70*2.20m
装箱尺寸:	Packaging Size:	1.35*0.70*2.15m

机器特点:
本机适用于闭口型钢拉链的上下止注塑,能适用不同模具,PLC控制,更换方便,操作简单,在保证拉链质量,节省操作空间,提高工人效率.

Machine features:

This machine is applicable to the up and down stop injection molding of closed plastic steel zippers. It can be applied to different molds. PLC control makes it easy to replace and operate. It can ensure the quality of zippers, save operation space and improve worker efficiency.

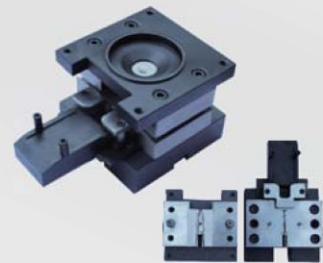

闭口模
Closed end mode



闭口上下止

闭口模

Closed end mode

型号:	ITEM NO:	JXM-03
材料:	Material:	P20,H13
重量:	Weight:	10kgs

机器特点:
此模具是全自动闭口注塑机的配套模具,注塑单上至或闭口上至,结合力好,质量稳定.

Machine features:

This mold is the supporting mold of the fully automatic closed injection molding machine. The injection sheet goes up to or up to the closed end, with good adhesion and stable quality.

超声波开口切断机械手


Ultrasonic cutter with manipulator

型号:	ITEM NO:	JX-2005K-C
功率:	POWER:	0.75KW
注射速度:	SPEED:	1600pcs/H,拉链长60mm
电压:	VOLTAGE:	380V
机器重量:	MACHINE Weight:	245Kgs
机器尺寸:	MACHINE SIZE:	2.15*0.85*1.90m
装箱尺寸:	Packaging Size:	1.00*0.70*1.70m

机器特点:
本机采用机械手控制拉带速度,超声波热熔原理来切断,切口平整,不起边,结合处牢固,可以适用于各种形状的拉片通过模具,钩针定位,拉链切口平整,操作方便,提高效率.

Machine features:

This machine adopts the speed of the mechanical hand to pull the belt, and the ultrasonic hot melting principle to cut. The cut is flat, without edges, and the joint is firm. It can be used for pulling pieces of various shapes through the mold, crochet positioning, and the zipper cut is flat. It is convenient to operate and improves efficiency.

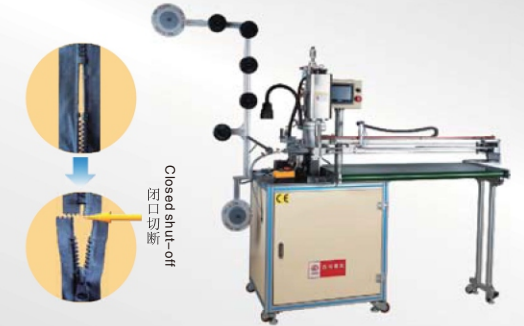

闭口切断

超声波切断机带机械手
Ultrasonic cutter with manipulator

普通闭口切断机

Ordinary closed cutting machine

型号:	ITEM NO:	JX-2005B
功率:	POWER:	0.75KW
注射速度:	SPEED:	1600pcs/H,拉链长60mm
电压:	VOLTAGE:	220V
机器重量:	MACHINE Weight:	245Kgs
机器尺寸:	MACHINE SIZE:	1.80*0.55*1.75m
装箱尺寸:	Packaging Size:	0.90*0.70*1.50m

机器特点:
本机采用步进电机控制拉带速度,钩针定位,保证拉链质量,节省操作空间,提高工人效率.

Machine features:

The machine adopts a stepping motor to control the belt pulling speed, and the crochet needle is positioned to ensure the zipper quality, save operation space, and improve the worker's efficiency.



闭口切断

普通闭口切断机
Ordinary closed cutting machine



普通切断机带机械手
Ordinary cutting machine with manipulator



闭口切断

普通开口切断机带机械手

Ordinary cutting machine with manipulator


型号:	ITEM NO:	JX-2005K-J
功率:	POWER:	0.75KW
注射速度:	SPEED:	1600pcs/H,拉链长60mm
电压:	VOLTAGE:	220V
机器重量:	MACHINE Weight:	245Kgs
机器尺寸:	MACHINE SIZE:	2.15*0.55*1.75m
装箱尺寸:	Packaging Size:	0.80*0.60*1.50m

机器特点:
本机采用机械手控制拉带速度,可以适用于各种形状的拉片通过模具,钩针定位,拉链切口平整,操作方便,提高效率.

Machine features:

The machine uses a manipulator to control the speed of the belt, which can be used for pulling pieces of various shapes through the mold, positioning the crochet, making the zipper cut smooth, easy to operate, and improving the efficiency.

nylon zipper o/e production line machine

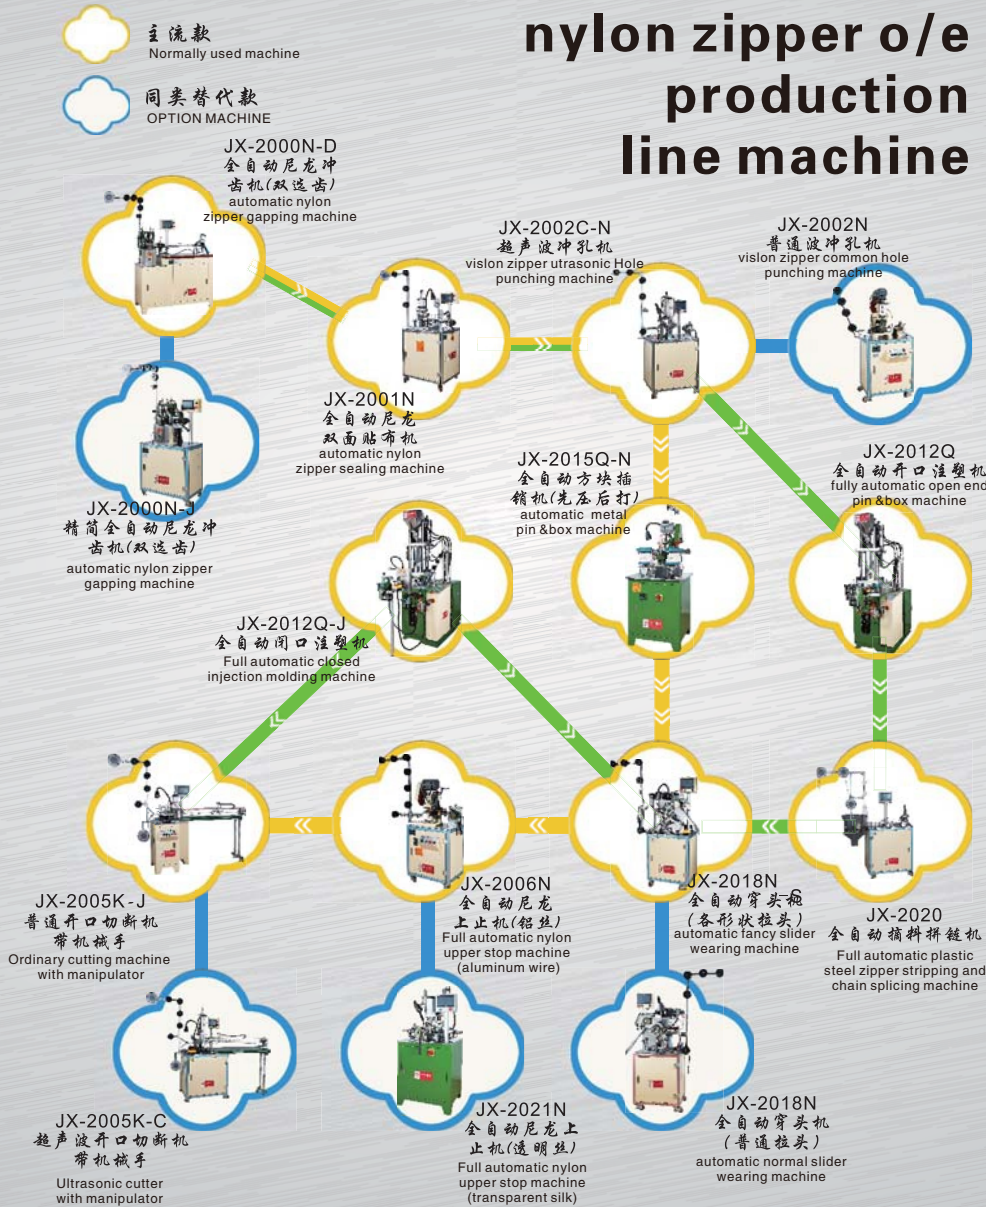


全自动尼龙冲齿机(双选齿) automatic nylon zipper gapping machine

型号:	ITEM NO:	JX-2000N-D
功率:	POWER:	0.75KW
注射速度:	SPEED:	1600pcs/H,拉链长60mm
电压:	VOLTAGE:	380V
机器重量:	MACHINE Weight:	245Kgs
机器尺寸:	MACHINE SIZE:	2.00*0.55*2.00m
装箱尺寸:	Packaging Size:	1.40*0.60*1.60m

机器特点:
本机采用双向免修齿结构,触摸屏全程控制,机械定位或伺服定位,尺寸长度准确,操作方便,不伤牙,无需人工修齿,节省劳动力,提高效率。

Machine features:
The machine adopts two-way repair free structure, touch screen full range control, mechanical positioning or servo positioning, accurate sizing length, convenient operation, no tooth injury, no manual tooth repair, labor saving and efficiency improvement.

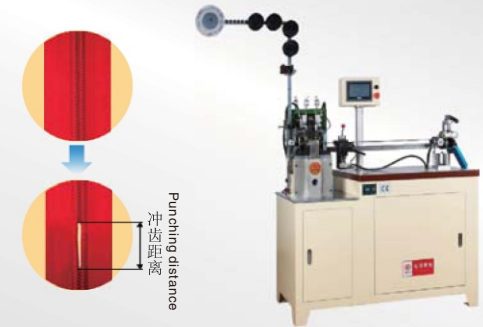


全自动尼龙冲齿机(全双选)
automatic nylon zipper gapping machine

精简全自动尼龙冲齿机(双选) automatic nylon zipper gapping machine

型号:	ITEM NO:	JX-2000N-J
功率:	POWER:	0.75KW
注射速度:	SPEED:	1600pcs/H,拉链长60mm
电压:	VOLTAGE:	220V
机器重量:	MACHINE Weight:	234Kgs
机器尺寸:	MACHINE SIZE:	1.30*0.55*2.00m
装箱尺寸:	Packaging Size:	0.80*0.60*1.50m

机器特点:
本机采用双向免修齿结构,触摸屏全程控制,伺服定位,尺寸长度准确,操作方便,不伤牙,无需人工修齿,机器体积小,不占空间,节省劳动力,提高效率。

Machine features:
The machine adopts two-way tooth free structure, touch screen full range control, servo positioning, accurate sizing length, convenient operation, no tooth damage, no need for manual tooth repair, small machine size does not take up space, saves labor and improves efficiency.

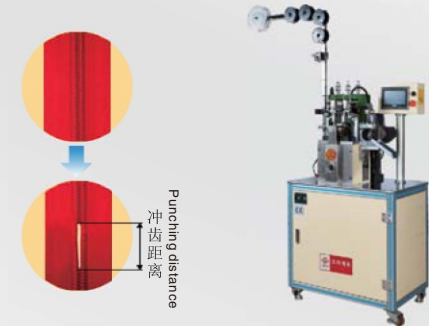


精简全自动尼龙冲齿机(全双选)
automatic nylon zipper gapping machine

全自动尼龙双内贴布机 automatic nylon zipper sealing machine

型号:	ITEM NO:	JX-2001N
功率:	POWER:	1.50KW
注射速度:	SPEED:	1600pcs/H,拉链长60mm
电压:	VOLTAGE:	220V
机器重量:	MACHINE Weight:	200Kgs
机器尺寸:	MACHINE SIZE:	1.65*0.65*1.80m
装箱尺寸:	Packaging Size:	1.00*0.70*1.50m

机器特点:
本机采用高端超声波控制系统,胶布粘合力强,工作稳定,操作简单,有效提高工人效率。


Machine features:
This machine adopts high-end ultrasonic control system, with strong adhesive tape, stable operation, simple operation, and effective improvement of worker efficiency.

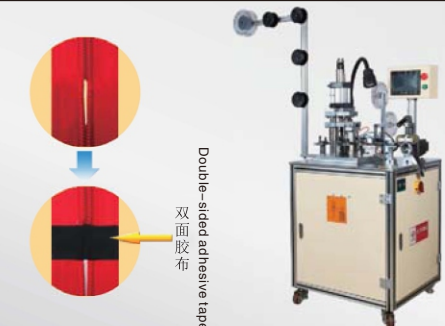

全自动尼龙双面贴布机
automatic nylon zipper sealing machine



超声波冲孔机
vislon zipper ultrasonic Hole punching machine

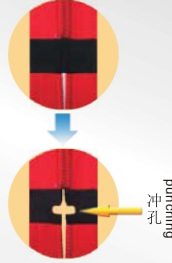

冲孔
punching

超声波冲孔机

vislon zipper ultrasonic Hole punching machine

型号:	ITEM NO:	JX-2002C-N
功率:	POWER:	1.65KW
注射速度:	SPEED:	1800pcs/H,拉链长60mm
电压:	VOLTAGE:	220V
机器重量:	MACHINE Weight:	120Kgs
机器尺寸:	MACHINE SIZE:	1.50*0.65*1.95m
装箱尺寸:	Packaging Size:	0.80*0.70*1.65m

机器特点:


本机采用超声波融孔,融孔平整,不起边,边缘强度高,有效提高后续方块插销注塑的结合力,保证拉链质量,提高工人效率。

Machine features:

The machine adopts ultrasonic hole melting, which is flat, without edge, and has high edge strength. It can effectively improve the binding force of subsequent block bolt injection molding, ensure the quality of zipper, and improve the efficiency of workers.



普通冲孔机
vislon zipper common hole punching machine

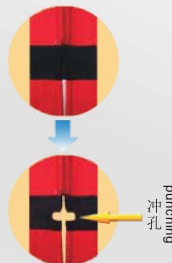

冲孔
punching

普通冲孔机

vislon zipper common hole punching machine

型号:	ITEM NO:	JX-2002N
功率:	POWER:	0.50KW
注射速度:	SPEED:	1800pcs/H,拉链长60mm
电压:	VOLTAGE:	220V
机器重量:	MACHINE Weight:	85Kgs
机器尺寸:	MACHINE SIZE:	1.10*0.55*1.45m
装箱尺寸:	Packaging Size:	0.65*0.65*1.40m

机器特点:

本机采用全自动冲孔系统,定位准确,冲孔清晰,同时模具更换方便,操作简单,节省劳动力,提高效率。

Machine features:

The machine adopts automatic punching system, with accurate positioning, clear punching, convenient mold replacement, simple operation, labor saving and efficiency improvement.



塑钢拉链压胶机
automatic metal pin & box machine



方块插销
square bolt

全自动方块插销机(先压后打)

Plastic steel zipper glue press

型号:	ITEM NO:	JX-2015Q-N
功率:	POWER:	2.0KW
注射速度:	SPEED:	1600pcs/H,拉链长60mm
电压:	VOLTAGE:	220V
机器重量:	MACHINE Weight:	245Kgs
机器尺寸:	MACHINE SIZE:	1.30*0.75*1.75m
装箱尺寸:	Packaging Size:	0.80*0.80*1.50m

机器特点:

本机采用先进工艺,使方块插销安装更加牢固美观,冲针耐磨损,使用寿命长。

Machine features:

This machine adopts advanced technology, which makes the installation of the square bolt more solid and beautiful, the punch pin is wear-resistant, and the applicable life is long.

全自动开口注塑机

fully automatic open end pin & box machine

型号:	ITEM NO:	JX-2012Q
功率:	POWER:	4.00KW
平均产量:	Average output:	1000pcs/H,拉链长60mm
螺杆直径:	Screw diameter:	25mm
标准射出量:	Standard output:	80g
电压:	VOLTAGE:	380V
机器重量:	MACHINE Weight:	950Kgs
机器尺寸:	MACHINE SIZE:	2.00*0.70*2.20m
装箱尺寸:	Packaging Size:	1.35*0.70*2.15m

机器特点:

本机适用于尼龙拉链,树脂开口拉链,将方块插销和上下注塑于拉链上,适用带拉头或无拉头拉链,方块插销结合力强,人工效率高,适用范围广。

Machine features:

This machine is suitable for nylon zippers and resin zippers. It injects block latches and upper stops onto zippers. It is suitable for zippers with or without pull heads. The block latches have strong binding force, high labor efficiency and wide application range.



注塑方块插销
Injection molded square bolt



全自动开口注塑机
fully automatic open end pin & box machine

全自动尼龙拉链摘料拼链机

Full automatic plastic steel zipper stripping and chain splicing machine

型号:	ITEM NO:	JX-2002N
功率:	POWER:	0.75KW
平均产量:	SPEED:	1600pcs/H,拉链长60mm
电压:	VOLTAGE:	220V
机器重量:	MACHINE Weight:	245Kgs
机器尺寸:	MACHINE SIZE:	1.60*0.50*1.90m
装箱尺寸:	Packaging Size:	0.70*0.70*1.40m

机器特点:

本机是专业研发用于型钢开口拉链自动摘料和拼链的设备,实现全自动摘除开口注塑机后产生的余料,改进工艺流程,解决了需要人工手动拉头的缺点,节省劳动力,提高效率。

Machine features:

This machine is a professional R&D equipment used for automatic stripping and chain splicing of plastic steel opening zippers. It realizes the full automatic removal of the leftovers generated after the opening injection molding machine, improves the process flow, solves the shortcomings of manual threading and pulling, saves labor and improves efficiency.



摘料拼链
Zipper stripping and chain splicing



全自动型钢拉链摘料拼链机
Full automatic plastic steel zipper stripping and chain splicing machine

全自动穿头机(各形状拉头)

automatic fancy slider wearing machine

型号:	ITEM NO:	JX-2018N-D
功率:	POWER:	0.75KW
注射速度:	SPEED:	1600pcs/H,拉链长60mm
电压:	VOLTAGE:	380V
机器重量:	MACHINE Weight:	245Kgs
机器尺寸:	MACHINE SIZE:	1.40*0.55*1.75m
装箱尺寸:	Packaging Size:	0.75*0.60*1.60m

机器特点:

本机能将不同形状的拉头套入开口或闭口拉链中,全程自动,操作方便,自动检测故障,工作稳定,节省劳动力,提高效率。

Machine features:


This machine can cover the pull heads of different shapes into the open or closed zippers. It is automatic in the whole process, convenient in operation, automatic in fault detection, stable in work, labor saving and efficiency improving.



拉头套入
Slider pulling



全自动穿头机(各形状拉头)
automatic fancy slider wearing machine

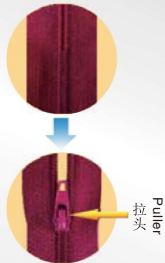

拉头
Puller

全自动穿头机(普通拉头)

automatic normal slider wearing machine

全自动穿头机(普通拉头) automatic normal slider wearing machine

型号:	ITEM NO:	JX-2018N
功率:	POWER:	0.75KW
注射速度:	SPEED:	1600pcs/H,拉链长60mm
电压:	VOLTAGE:	380V
机器重量:	MACHINE Weight:	245Kgs
机器尺寸:	MACHINE SIZE:	1.30*0.55*1.75m
装箱尺寸:	Packaging Size:	0.75*0.60*1.60m

机器特点:
本机适用普通拉头套入开口或闭口拉链中,工作速度快,全自动操作,自动检测故障,操作方便,节省劳动力,提高效率。


Machine features:
This machine is suitable for ordinary pullers to be sleeved into open or closed zippers, with working speed block, fully automatic operation, automatic fault detection, convenient operation, labor saving and efficiency improvement.

全自动闭口注塑机 Full automatic closed injection molding machine

型号:	ITEM NO:	JX-2012Q-1
功率:	POWER:	4.00KW
平均产量:	Average output:	1000pcs/H,拉链长60mm
螺杆直径:	Screw diameter:	25mm
标准射出量:	Standard output:	80g
电压:	VOLTAGE:	380V
机器重量:	MACHINE Weight:	950Kgs
机器尺寸:	MACHINE SIZE:	2.10*0.70*2.20m
装箱尺寸:	Packaging Size:	1.35*0.70*2.15m

机器特点:
本机适用于闭口塑钢拉链的上下止注塑,能适用不同模具,PLC控制,更换方便,操作简单,在保证拉链质量,节省操作空间,提高工人效率。

Machine features:
This machine is applicable to the up and down stop injection molding of closed plastic steel zippers. It can be applied to different molds. PLC control makes it easy to replace and operate. It can ensure the quality of zippers, save operation space and improve worker efficiency.

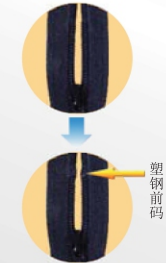


塑钢前码
Plastic steel front size



全自动闭口注塑机

fully automatic open end pin & box machine

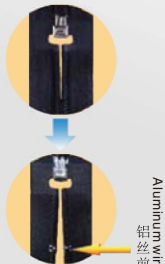

铝丝前码
Aluminum wire front size

全自动尼龙上止机(铝丝)

Full automatic nylon upper stop machine (aluminum wire)

全自动尼龙上止机(铝丝) Full automatic nylon upper stop machine(aluminum wire)

型号:	ITEM NO:	JX-2006N
功率:	POWER:	0.50KW
注射速度:	SPEED:	1800pcs/H,拉链长60mm
电压:	VOLTAGE:	220V
机器重量:	MACHINE Weight:	100Kgs
机器尺寸:	MACHINE SIZE:	1.50*0.70*1.85m
装箱尺寸:	Packaging Size:	0.70*0.70*1.40m

机器特点:
本机将扁铝丝自动紧固在开口或闭口尼龙拉链,成型后上止整齐,无伤痕,操作简单,速度快。

Machine features:
This machine automatically fastens the flat aluminum wire on the open or closed nylon zipper. After forming, the upper stop is neat, without scars, and the operation is simple and fast.

普通开口切断机带机械手 Ordinary cutting machine with manipulator

型号:	ITEM NO:	JX-2005K-1
功率:	POWER:	0.75KW
注射速度:	SPEED:	1600pcs/H,拉链长60mm
电压:	VOLTAGE:	220V
机器重量:	MACHINE Weight:	245Kgs
机器尺寸:	MACHINE SIZE:	2.15*0.55*1.75m
装箱尺寸:	Packaging Size:	0.80*0.60*1.50m

机器特点:
本机采用机械手控制拉带速度,可以用于各种形状的拉片通过模具,钩针定位,拉链切口平整,操作方便,提高效率。

Machine features:
The machine uses a manipulator to control the speed of the belt, which can be used for pulling pieces of various shapes through the mold, positioning the crochet, making the zipper cut smooth, easy to operate, and improving the efficiency.



开口切断
Opening cut



普通切断机带机械手

Ordinary cutting machine with manipulator



透明丝前码
Transparent silk front size

全自动尼龙上止机(透明丝)

Full automatic nylon upper stop machine (transparent silk)

全自动尼龙上止机(透明丝) Full automatic nylon upper stop machine (transparent silk)

型号:	ITEM NO:	JX-2021N
功率:	POWER:	0.75KW
注射速度:	SPEED:	1600pcs/H,拉链长60mm
电压:	VOLTAGE:	220V
机器重量:	MACHINE Weight:	245Kgs
机器尺寸:	MACHINE SIZE:	1.40*0.90*1.70m
装箱尺寸:	Packaging Size:	1.00*1.00*1.60m

机器特点:
本机将扁尼龙丝切断成U型并熔接在尼龙拉链上止端,成型后上止透明,美观,机器运行稳定,适用是高端拉链中。


Machine features:
The flat nylon zipper is cut into U shape and welded to the top end of the nylon zipper. After forming, the top end is transparent and beautiful. The machine runs stably and is suitable for high-end zippers.

超声波开口切断机带机械手 Ultrasonic cutter with manipulator

型号:	ITEM NO:	JX-2005K-C
功率:	POWER:	0.75KW
注射速度:	SPEED:	1600pcs/H,拉链长60mm
电压:	VOLTAGE:	380V
机器重量:	MACHINE Weight:	245Kgs
机器尺寸:	MACHINE SIZE:	2.15*0.85*1.90m
装箱尺寸:	Packaging Size:	1.00*0.70*1.70m

机器特点:
本机采用机械手控制拉带速度,超声波热熔原理来切断,切口平整,不边翘,结合处牢固,可以用于各种形状的拉片通过模具,钩针定位,拉链切口平整,操作方便,提高效率。

Machine features:
This machine uses a manipulator to control the speed of the belt, and the ultrasonic hot melting principle to cut. The cut is flat, without edges, and the joint is firm. It can be used for pulling pieces of various shapes through the mold, crochet positioning, zipper cut is flat, easy to operate, and improve efficiency.

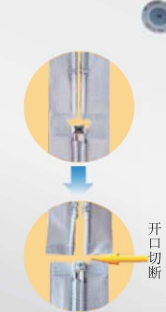

开口切断
Opening cut



超声波切断机带机械手

Ultrasonic cutter with manipulator

主流款
Normally used machine

同类替代款
OPTION MACHINE

nylon zipper o/e production line machine

JX-2000N-D
全自动尼龙冲
齿机(双选齿)
automatic nylon
zipper gapping machine

JX-2000N-J
精简全自动尼龙冲
齿机(双选齿)
automatic nylon
zipper gapping machine

JX-2018N-S
全自动穿头机
(各形状拉头)
automatic fancy slider
wearing machine

JX-2018N
全自动穿头机
(普通拉头)
automatic normal slider
wearing machine

JX-2010Q-N
全自动尼龙
下止机(铝丝)
automatic nylon
zipper end stopper
machine (aliumium wire)

JX-2006N
全自动尼龙
上止机(铝丝)
Full automatic nylon
upper stop machine
(aluminum wire)

JX-2012Q-J
全自动闭口注塑机
fully automatic closed
end bottom stopper machine

JX-2021N
全自动尼龙上
止机(透明丝)
Full automatic nylon
upper stop machine
(transparent silk)

JX-2005K-J
普通闭口切断机
带机械手
Ordinary closed zipper
cutting machine

JX-2005K-C
超声波闭口切断机
带机械手
Ultrasonic cutter
with manipulator


JX-2005B
普通闭口切断机
with manipulator

全自动尼龙冲齿机(双选齿) automatic nylon zipper gapping machine

型号:	ITEM NO:	JX-2000N-D
功率:	POWER:	0.75KW
注射速度:	SPEED:	1600pcs/H,拉链长60mm
电压:	VOLTAGE:	380V
机器重量:	MACHINE Weight:	245Kgs
机器尺寸:	MACHINE SIZE:	2.00*0.55*2.00m
装箱尺寸:	Packaging Size:	1.40*0.60*1.60m

机器特点:
本机采用双向免修齿结构,触摸屏
全程控制,机械定位或伺服定位,定寸长
度准确,操作方便,不伤牙,无需人工修齿,
节省劳动力,提高效率。

Machine features:
The machine adopts two-way tooth repair free structure, touch screen full range control, mechanical positioning or servo positioning, accurate sizing length, convenient operation, no tooth injury, no need for manual tooth repair, labor saving and efficiency improvement.

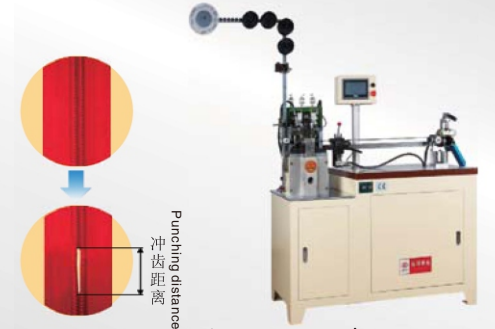


全自动尼龙冲齿机(双选齿)
automatic nylon zipper gapping machine

精简全自动尼龙冲齿机(双选齿) automatic nylon zipper gapping machine

型号:	ITEM NO:	JX-2000N-J
功率:	POWER:	0.75KW
注射速度:	SPEED:	1600pcs/H,拉链长60mm
电压:	VOLTAGE:	220V
机器重量:	MACHINE Weight:	234Kgs
机器尺寸:	MACHINE SIZE:	1.30*0.55*2.00m
装箱尺寸:	Packaging Size:	0.80*0.60*1.50m

机器特点:
本机采用双向免修齿结构,触摸屏
全程控制,伺服定位,定寸长度准确,操作
方便,不伤牙,无需人工修齿,机器体积小,
不占空间,节省劳动力,提高效率。

Machine features:
The machine adopts two-way tooth free structure, touch screen full range control, servo positioning, accurate sizing length, convenient operation, no tooth damage, no need for manual tooth repair, small machine size does not take up space, saves labor and improves efficiency.

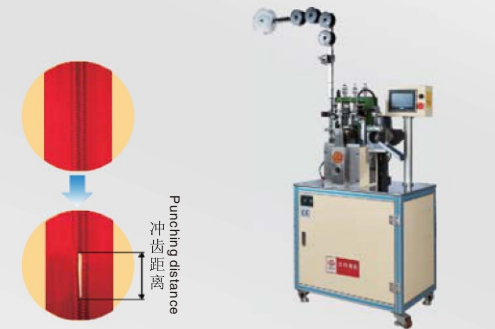


精简全自动尼龙冲齿机(双选齿)
automatic nylon zipper gapping machine

全自动尼龙下止机(铝丝) automatic nylon zipper end stopper machine (aliumium wire)

型号:	ITEM NO:	JX-2010Q-N
功率:	POWER:	0.5KW
注射速度:	SPEED:	1800pcs/H,拉链长60mm
电压:	VOLTAGE:	220V
机器重量:	MACHINE Weight:	100Kgs
机器尺寸:	MACHINE SIZE:	1.20*0.55*1.50m
装箱尺寸:	Packaging Size:	0.65*0.60*1.50m

机器特点:
本机将扁铝丝自动紧固在闭口尼龙拉
链,成型后下止整齐,无伤痕,操作简单,
速度快。

Machine features:
This machine automatically fastens the flat aluminum wire on the closed nylon zipper. After forming, the bottom stops neatly, without scars, and the operation is simple and fast.

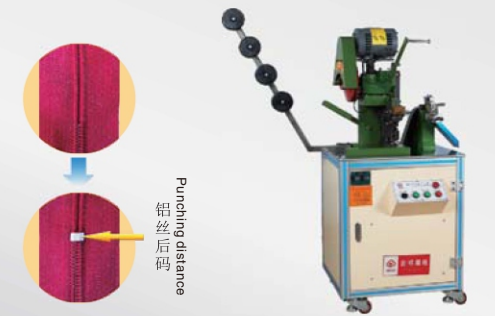

全自动尼龙下止机(铝丝)
automatic nylon zipper end stopper
machine (aliumium wire)



拉头 Puller

全自动穿头机(各形状拉头)
automatic fancy slider wearing machine

全自动穿头机(各形状拉头) automatic fancy slider wearing machine

型号:	ITEM NO:	JX-2018N-D
功率:	POWER:	0.75KW
注射速度:	SPEED:	1600pcs/H,拉链长60mm
电压:	VOLTAGE:	380V
机器重量:	MACHINE Weight:	245Kgs
机器尺寸:	MACHINE SIZE:	1.40*0.55*1.75m
装箱尺寸:	Packaging Size:	0.75*0.60*1.60m

机器特点:
本机能将不同形状的拉头套入开口或闭口拉链中,全程自动,操作方便,自动检测故障,工作稳定,节省劳动力,提高效率。

Machine features:
This machine can cover the pull heads of different shapes into the open or closed zippers. It is automatic in the whole process, convenient in operation, automatic in fault detection, stable in work, labor saving and efficiency improving.

全自动尼龙上止机(铝丝) Full automatic nylon upper stop machine (aluminum wire)

型号:	ITEM NO:	JX-2006N
功率:	POWER:	0.50KW
注射速度:	SPEED:	1800pcs/H,拉链长60mm
电压:	VOLTAGE:	220V
机器重量:	MACHINE Weight:	100Kgs
机器尺寸:	MACHINE SIZE:	1.50*0.70*1.85m
装箱尺寸:	Packaging Size:	0.70*0.70*1.40m

机器特点:
本机将扁铝丝自动紧固在开口或闭口尼龙拉链,成型后上止整齐,无伤痕,操作简单,速度快。

Machine features:
This machine automatically fastens the flat aluminum wire on the open or closed nylon zipper. After forming, the upper stop is neat, without scars, and the operation is simple and fast.



铝丝前码



全自动尼龙上止机(铝丝)
Full automatic nylon upper stop machine (aluminum wire)



拉头

全自动穿头机(普通拉头)
automatic normal slider wearing machine

全自动穿头机(普通拉头) automatic normal slider wearing machine

型号:	ITEM NO:	JX-2018N
功率:	POWER:	0.75KW
注射速度:	SPEED:	1600pcs/H,拉链长60mm
电压:	VOLTAGE:	380V
机器重量:	MACHINE Weight:	245Kgs
机器尺寸:	MACHINE SIZE:	1.30*0.55*1.75m
装箱尺寸:	Packaging Size:	0.75*0.60*1.60m

机器特点:
本机适用普通拉头套入开口或闭口拉链中,工作速度快,全自动操作,自动检测故障,操作方便,节省劳动力,提高效率。

Machine features:
This machine is suitable for ordinary pullers to be sleeved into open or closed zippers, with fast working speed, fully automatic operation, automatic fault detection, convenient operation, labor saving and efficiency improvement.

全自动尼龙上止机(透明丝) Full automatic nylon upper stop machine (transparent silk)

型号:	ITEM NO:	JX-2021N
功率:	POWER:	0.75KW
注射速度:	SPEED:	1600pcs/H,拉链长60mm
电压:	VOLTAGE:	220V
机器重量:	MACHINE Weight:	245Kgs
机器尺寸:	MACHINE SIZE:	1.40*0.90*1.70m
装箱尺寸:	Packaging Size:	1.00*1.00*1.60m

机器特点:
本机将扁尼龙丝切断成U型并熔接在尼龙拉链上止端,成型后上止透明,美观,机器运行稳定,适用是高端拉链中。


Machine features:
The flat nylon wire is cut into U shape and welded to the top end of the nylon zipper. After forming, the top end is transparent and beautiful. The machine runs stably and is suitable for high-end zippers.



透明丝前码



全自动尼龙上止机(透明丝)
Full automatic nylon upper stop machine (transparent silk)

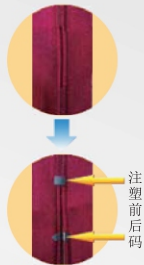

注塑前后码

全自动闭口注塑机
fully automatic closed end bottom stopper machine

全自动闭口注塑机 fully automatic closed end bottom stopper machine

型号:	ITEM NO:	JX-2012Q
功率:	POWER:	4.00KW
平均产量:	Average output:	1000pcs/H,拉链长60mm
螺杆直径:	Screw diameter:	25mm
标准射出量:	Standard output:	80g
电压:	VOLTAGE:	380V
机器重量:	MACHINE Weight:	950Kgs
机器尺寸:	MACHINE SIZE:	2.10*0.70*2.20m
装箱尺寸:	Packaging Size:	1.35*0.70*2.15m

机器特点:
本机适用于闭口型钢拉链的上下止注塑,能适用不同模具,PLC控制,更换方便,操作简单,在保证拉链质量,节省操作空间,提高工人效率。

Machine features:
This machine is applicable to the up and down stop injection molding of closed plastic steel zippers. It can be applied to different molds. PLC control makes it easy to replace and operate. It can ensure the quality of zippers, save operation space and improve worker efficiency.

普通开口切断机带机械手 Ordinary cutting machine with manipulator


型号:	ITEM NO:	JX-2005K-J
功率:	POWER:	0.75KW
注射速度:	SPEED:	1600pcs/H,拉链长60mm
电压:	VOLTAGE:	220V
机器重量:	MACHINE Weight:	245Kgs
机器尺寸:	MACHINE SIZE:	2.15*0.55*1.75m
装箱尺寸:	Packaging Size:	0.80*0.60*1.50m

机器特点:
本机采用机械手控制拉带速度,可以适用于各种形状的拉片通过模具,钩针定位,拉链切口平整,操作方便,提高效率。

Machine features:
The machine uses a manipulator to control the speed of the belt, which can be used for pulling pieces of various shapes through the mold, positioning the crochet, making the zipper cut smooth, easy to operate, and improving the efficiency.



闭口切断

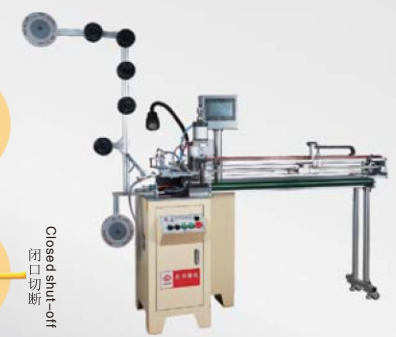

普通切断机带机械手
Ordinary cutting machine with manipulator



闭口切断
Closed shut-off

超声波切断机带机械手
Ultrasonic cutter with manipulator


超声波开口切断机带机械手 Ultrasonic cutter with manipulator

型号:	ITEM NO:	JX-2005K-C
功率:	POWER:	0.75KW
注射速度:	SPEED:	1600pcs/H,拉链长60mm
电压:	VOLTAGE:	380V
机器重量:	MACHINE Weight:	245Kgs
机器尺寸:	MACHINE SIZE:	2.15*0.85*1.90m
装箱尺寸:	Packaging Size:	1.00*0.70*1.70m

机器特点:
本机采用机械手控制拉带速度,超声波热熔原理来切断,切口平整,不起边,结合处牢固.可以适用于各种形状的拉片通过模具,钩针定位,拉链切口平整,操作方便,提高效率.

Machine features:

This machine uses a manipulator to control the speed of the belt, and the ultrasonic hot melting principle to cut. The cut is flat, without edges, and the joint is firm. It can be used for pulling pieces of various shapes through the mold, crochet positioning, zipper cut is flat, easy to operate, and improve efficiency.

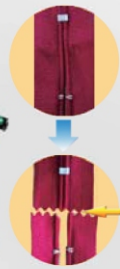

闭口切断
Closed shut-off

普通闭口拉链切断机
Ordinary closed zipper cutting machine

普通闭口切断机 Ordinary closed zipper cutting machine

型号:	ITEM NO:	JX-2005B
功率:	POWER:	0.75KW
注射速度:	SPEED:	1600pcs/H,拉链长60mm
电压:	VOLTAGE:	220V
机器重量:	MACHINE Weight:	245Kgs
机器尺寸:	MACHINE SIZE:	1.80*0.55*1.75m
装箱尺寸:	Packaging Size:	0.90*0.70*1.50m

机器特点:
本机采用步进电机控制拉带速度,钩针定位,保证拉链质量,节省操作空间,提高工人效率.


Machine features:


The machine adopts a stepping motor to control the belt pulling speed, and the crochet needle is positioned to ensure the zipper quality, save operation space, and improve the worker's efficiency.

metal zipper o/e production line machine

主流款
Normally used machine

同类替代款
OPTION MACHINE

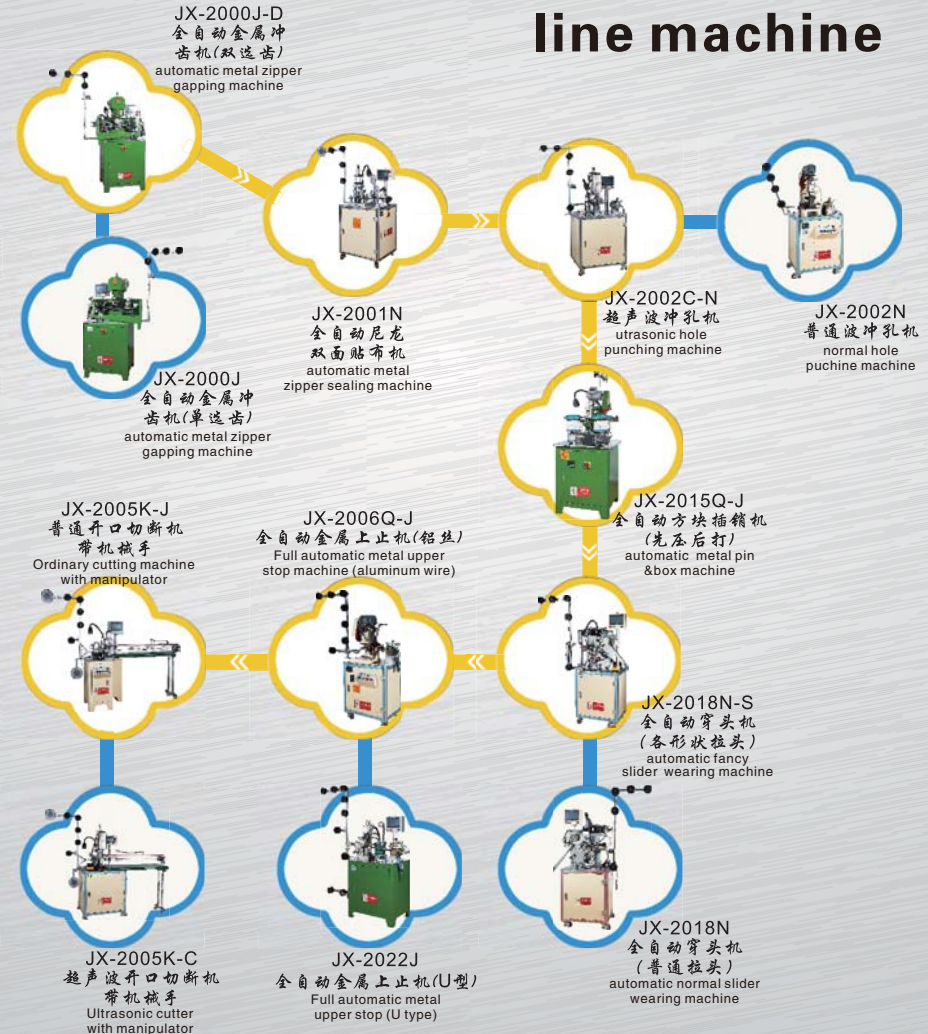

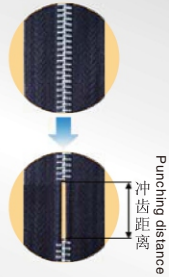

Punching distance

全自动金属冲齿机(双选齿)
automatic metal zipper gapping machine

全自动金属冲齿机(双选齿) automatic metal zipper gapping machine

型号:	ITEM NO:	[X-2000]-D
功率:	POWER:	0.75KW
注射速度:	SPEED:	1600pcs/H,拉链长60mm
电压:	VOLTAGE:	380V
机器重量:	MACHINE Weight:	245Kgs
机器尺寸:	MACHINE SIZE:	1.60*0.65*1.85m
装箱尺寸:	Packaging Size:	1.00*0.75*1.60m

机器特点:
本机采用双向免修齿结构,触摸屏全程控制,机械定位或伺服定位,定寸长度准确,操作方便,不伤牙,无需人工修齿,节省劳动力,提高效率.


Machine features:
The machine adopts two-way tooth free structure, touch screen full range control, mechanical positioning, servo positioning, accurate sizing length, convenient operation, no tooth injury, no need for manual tooth repair, labor saving and efficiency improvement.

超声波冲孔机 ultrasonic hole punching machine

型号:	ITEM NO:	[X-2002C-J]
功率:	POWER:	1.65KW
注射速度:	SPEED:	1800pcs/H,拉链长60mm
电压:	VOLTAGE:	220V
机器重量:	MACHINE Weight:	120Kgs
机器尺寸:	MACHINE SIZE:	1.50*0.65*1.95m
装箱尺寸:	Packaging Size:	0.80*0.70*1.65m

机器特点:
本机采用超声波融孔,融孔平整,不起边,边缘强度高,有效提高后续方块插销注塑的结合力,保证拉链质量,提高工人效率.

Machine features:
The machine adopts ultrasonic hole melting, which is flat, without edge, and has high edge strength. It can effectively improve the binding force of subsequent block bolt injection molding, ensure the quality of zipper, and improve the efficiency of workers.

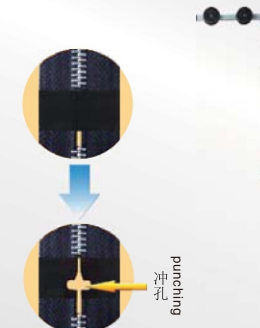

punching

超声波冲孔机
ultrasonic hole punching machine

全自动金属冲齿机(单选齿) automatic metal zipper gapping machine

型号:	ITEM NO:	[X-2000]
功率:	POWER:	0.75KW
注射速度:	SPEED:	1600pcs/H,拉链长60mm
电压:	VOLTAGE:	380V
机器重量:	MACHINE Weight:	245Kgs
机器尺寸:	MACHINE SIZE:	1.60*0.65*1.85m
装箱尺寸:	Packaging Size:	1.00*0.75*1.60m

机器特点:
本机采用单边修齿结构,触摸屏全程控制,伺服定位,定寸长度准确,操作方便,不伤牙,节省劳动力,提高效率.


Machine features:
The machine adopts single side tooth trimming structure, touch screen full range control, servo positioning, accurate sizing length, convenient operation, no tooth damage, labor saving and efficiency improvement.

普通冲孔机 normal hole puchine machine

型号:	ITEM NO:	[X-2002]
功率:	POWER:	0.50KW
注射速度:	SPEED:	1800pcs/H,拉链长60mm
电压:	VOLTAGE:	220V
机器重量:	MACHINE Weight:	85Kgs
机器尺寸:	MACHINE SIZE:	1.10*0.55*1.45m
装箱尺寸:	Packaging Size:	0.65*0.65*1.40m

机器特点:
本机采用全自动冲孔系统,定位准确,冲孔清晰,同时模具更换方便,操作简单,节省劳动力,提高效率.

Machine features:
The machine adopts ultrasonic hole melting, which is flat, without edge, and has high edge strength. It can effectively improve the binding force of subsequent block bolt injection molding, ensure the quality of zipper, and improve the efficiency of workers.

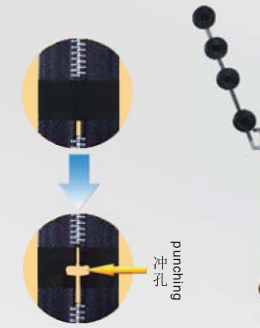

punching

普通冲孔机
normal hole puchine machine

全自动金属双面贴布机 automatic metal zipper sealing machine

型号:	ITEM NO:	[X-2001]
功率:	POWER:	1.50KW
注射速度:	SPEED:	1600pcs/H,拉链长60mm
电压:	VOLTAGE:	220V
机器重量:	MACHINE Weight:	200Kgs
机器尺寸:	MACHINE SIZE:	1.65*0.65*1.80m
装箱尺寸:	Packaging Size:	1.00*0.70*1.50m

机器特点:
本机采用高端超声波控制系统,胶布粘合度强,工作稳定,操作简单,有效提高工人效率.


Machine features:
This machine adopts high-end ultrasonic control system, with strong adhesive tape, stable operation, simple operation, and effective improvement of worker efficiency.

全自动方块插销机(先压后打) automatic metal pin & box machine

型号:	ITEM NO:	[X-2015Q-J]
功率:	POWER:	2.0KW
注射速度:	SPEED:	1600pcs/H,拉链长60mm
电压:	VOLTAGE:	220V
机器重量:	MACHINE Weight:	245Kgs
机器尺寸:	MACHINE SIZE:	1.30*0.75*1.75m
装箱尺寸:	Packaging Size:	0.80*0.80*1.50m

机器特点:
本机采用先进工艺,使方块插销安装更加牢固美观,冲针耐磨损,使用寿命长.

Machine features:
This machine adopts advanced technology, which makes the installation of the square bolt more solid and beautiful, the punch pin is wear-resistant, and the applicable life is long.

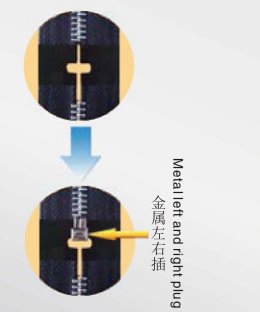


Metal left and right plug
金属左右插

全自动方块插销机(先压后打)
automatic metal pin & box machine

全自动金属双面贴布机
automatic metal zipper sealing machine

双面胶布
Double-sided adhesive tape

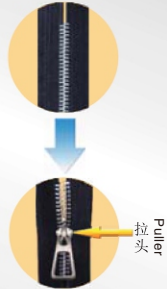

拉头
Puller

全自动穿头机(各形状拉头)
automatic fancy slider wearing machine

全自动穿头机(各形状拉头) automatic fancy slider wearing machine

型号:	ITEM NO:	X-2018 -D
功率:	POWER:	0.75KW
注射速度:	SPEED:	1600pcs/H,拉链长60mm
电压:	VOLTAGE:	380V
机器重量:	MACHINE Weight:	245Kgs
机器尺寸:	MACHINE SIZE:	1.40*0.55*1.75m
装箱尺寸:	Packaging Size:	0.75*0.60*1.60m

机器特点:
本机能将不同形状的拉头套入开口或闭口拉链中,全程自动,操作方便,自动检测故障,工作稳定,节省劳动力,提高效率。

Machine features:
This machine can cover the pull heads of different shapes into the open or closed zippers. It is automatic in the whole process, convenient in operation, automatic in fault detection, stable in work, labor saving and efficiency improving.

全自动金属上止机(U型) Full automatic metal upper stop (U type)

型号:	ITEM NO:	X-2022
功率:	POWER:	0.75KW
注射速度:	SPEED:	1600pcs/H,拉链长60mm
电压:	VOLTAGE:	380V
机器重量:	MACHINE Weight:	245Kgs
机器尺寸:	MACHINE SIZE:	1.50*0.60*1.85m
装箱尺寸:	Packaging Size:	0.70*0.70*1.60m

机器特点:
本机将U型金属上止拉自动紧固在开口或闭口金属拉链,成型后上止整齐,美观,大气,高端金属拉链首选。

Machine features:
This machine automatically fastens the U-shaped metal upper stop on the open or closed metal zipper. After forming, the upper stop is neat, beautiful and atmospheric. High end metal zippers are preferred.



金属前码
Metal front size



全自动金属上止机(U型)
Full automatic metal upper stop (U type)



拉头
Puller

全自动穿头机(普通拉头)
automatic normal slider wearing machine

全自动穿头机(普通拉头) automatic normal slider wearing machine

型号:	ITEM NO:	X-2018
功率:	POWER:	0.75KW
注射速度:	SPEED:	1600pcs/H,拉链长60mm
电压:	VOLTAGE:	380V
机器重量:	MACHINE Weight:	245Kgs
机器尺寸:	MACHINE SIZE:	1.30*0.55*1.75m
装箱尺寸:	Packaging Size:	0.75*0.60*1.60m

机器特点:
本机适用普通拉头套入开口或闭口拉链中,工作速度快,全自动操作,自动检测故障,操作方便,节省劳动力,提高效率。

Machine features:
This machine is suitable for ordinary pullers to be sleeved into open or closed zippers, with fast working speed, fully automatic operation, automatic fault detection, convenient operation, labor saving and efficiency improvement.

普通开口切断机带机械手 Ordinary cutting machine with manipulator


型号:	ITEM NO:	X-2005K-
功率:	POWER:	0.75KW
注射速度:	SPEED:	1600pcs/H,拉链长60mm
电压:	VOLTAGE:	220V
机器重量:	MACHINE Weight:	245Kgs
机器尺寸:	MACHINE SIZE:	2.15*0.55*1.75m
装箱尺寸:	Packaging Size:	0.80*0.60*1.50m

机器特点:
本机采用机械手控制拉带速度,可以用于各种形状的拉片通过模具,钩针定位,拉链切口平整,操作方便,提高效率。

Machine features:
The machine uses a manipulator to control the speed of the belt, which can be used for pulling pieces of various shapes through the mold, positioning the crochet, making the zipper cut smooth, easy to operate, and improving the efficiency.



开口切断
Opening cut

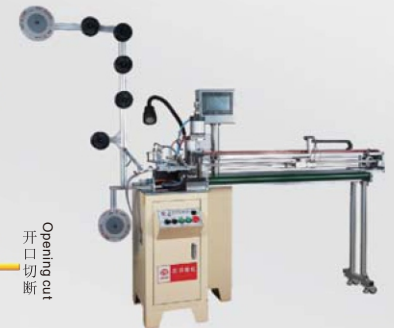

普通切断机带机械手
Ordinary cutting machine with manipulator



铝丝前码
Aluminum wire front size

全自动金属上止机(铝丝)
Full automatic metal upper stop machine (aluminum wire)

全自动尼龙上止机(铝丝) Full automatic metal upper stop machine (aluminum wire)

型号:	ITEM NO:	X-2006
功率:	POWER:	0.50KW
注射速度:	SPEED:	1800pcs/H,拉链长60mm
电压:	VOLTAGE:	220V
机器重量:	MACHINE Weight:	100Kgs
机器尺寸:	MACHINE SIZE:	1.50*0.70*1.85m
装箱尺寸:	Packaging Size:	0.70*0.70*1.40m

机器特点:
本机将扁铝丝自动紧固在开口或闭口尼龙拉链,成型后上止整齐,无伤痕,操作简单,速度快。

Machine features:
This machine automatically fastens the flat aluminum wire on the opening or closing. The nylon zipper stops neatly after forming, with no scars, simple operation and fast speed.

超声波开口切断机带机械手 Ultrasonic cutter with manipulator

型号:	ITEM NO:	X-2005K-C
功率:	POWER:	0.75KW
注射速度:	SPEED:	1600pcs/H,拉链长60mm
电压:	VOLTAGE:	380V
机器重量:	MACHINE Weight:	245Kgs
机器尺寸:	MACHINE SIZE:	2.15*0.85*1.90m
装箱尺寸:	Packaging Size:	1.00*0.70*1.70m

机器特点:
本机采用机械手控制拉带速度,超声波热熔原理来切断,切口平整,不起边,结合处牢固,可以用于各种形状的拉片通过模具,钩针定位,拉链切口平整,操作方便,提高效率。

Machine features:
This machine uses a manipulator to control the speed of the belt, and the ultrasonic hot melting principle to cut. The cut is flat, without edges, and the joint is firm. It can be used for pulling pieces of various shapes through the mold, crochet positioning, zipper cut is flat, easy to operate, and improve efficiency.



开口切断
Opening cut




超声波切断机带机械手
Ultrasonic cutter with manipulator

主流款
Normally used machine

同类替代款
OPTION MACHINE

metal zipper C/E production line machine

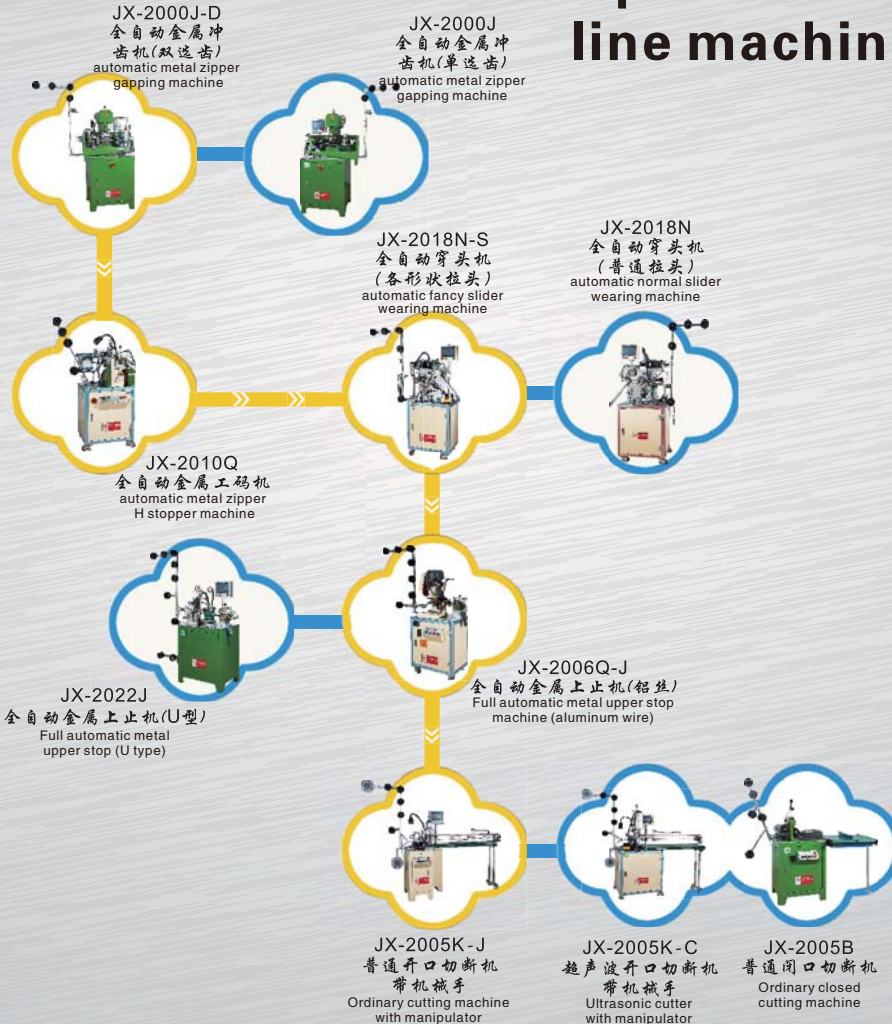


全自动金属冲齿机(双选齿) automatic metal zipper gapping machine

型号:	ITEM NO:	JX-2000J-D
功率:	POWER:	0.75KW
注射速度:	SPEED:	1600pcs/H,拉链长60mm
电压:	VOLTAGE:	380V
机器重量:	MACHINE Weight:	245Kgs
机器尺寸:	MACHINE SIZE:	1.60*0.65*1.85m
装箱尺寸:	Packaging Size:	1.00*0.75*1.60m

机器特点:
本机采用双向免修齿结构,触摸屏全程控制,机械定位或伺服定位,定寸长度准确,操作方便,不伤牙,无需人工修齿,节省劳动力,提高效率。

Machine features:
The machine adopts two-way tooth repair free structure, touch screen full range control, mechanical positioning or servo positioning, accurate sizing length, convenient operation, no tooth injury, no need for manual tooth repair, labor saving and efficiency improvement.

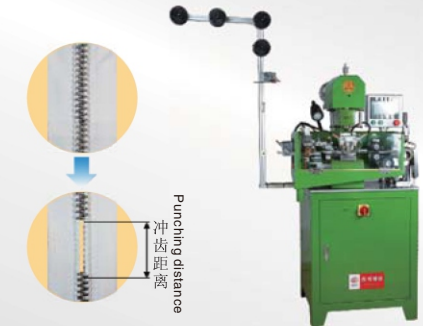


全自动金属冲齿机(双选齿)
automatic metal zipper gapping machine

全自动金属冲齿机(单选齿) automatic metal zipper gapping machine

型号:	ITEM NO:	JX-2000J
功率:	POWER:	0.75KW
注射速度:	SPEED:	1600pcs/H,拉链长60mm
电压:	VOLTAGE:	380V
机器重量:	MACHINE Weight:	245Kgs
机器尺寸:	MACHINE SIZE:	1.60*0.65*1.85m
装箱尺寸:	Packaging Size:	1.00*0.75*1.60m

机器特点:
本机采用单边修齿结构,触摸屏全程控制,伺服定位,定寸长度准确,操作方便,不伤牙,节省劳动力,提高效率。

Machine features:
The machine adopts single side tooth trimming structure, touch screen full range control, servo positioning, accurate sizing length, convenient operation, no tooth damage, labor saving and efficiency improvement.

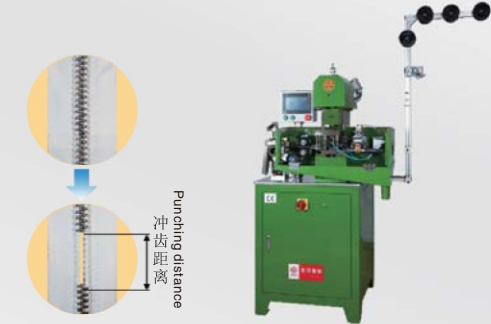


全自动金属冲齿机(单选齿)
automatic metal zipper gapping machine

全自动金属工码机 automatic metal zipper H stopper machine

型号:	ITEM NO:	JX-2010Q
功率:	POWER:	0.75KW
注射速度:	SPEED:	1600pcs/H,拉链长60mm
电压:	VOLTAGE:	380V
机器重量:	MACHINE Weight:	245Kgs
机器尺寸:	MACHINE SIZE:	1.15*0.55*1.60m
装箱尺寸:	Packaging Size:	0.70*0.60*1.40m

机器特点:
本机采用自动将工字码下止快速紧固在金属闭口拉链下止端,成型下止整齐,效率高,运行稳定。

Machine features:
The machine adopts automatic fastening of the lower end of the I-shaped code to the lower end of the metal closed zipper, forming the lower end neatly, with high efficiency and stable operation.

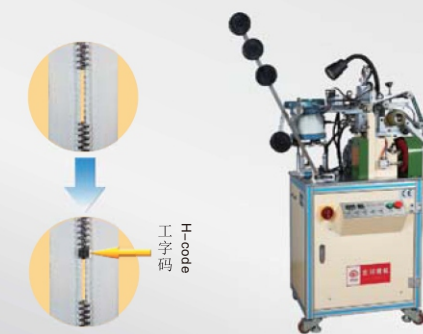

全自动金属工码机
automatic metal zipper H stopper machine



铝丝后码
Aluminum wire back code

全自动金属下止机(铝丝)
Full automatic metal down stop machine (aluminum wire)

全自动金属下止机(铝丝)

Full automatic metal down stop machine (aluminum wire)

型号:	ITEM NO:	[X-2010Q-]
功率:	POWER:	0.5KW
注射速度:	VOLTAGE:	1800pcs/H,拉链长60mm
电压:	MACHINE Weight:	220V
机器重量:	MACHINE SIZE:	100Kgs
机器尺寸:	Packaging Size:	0.70*0.70*1.55m

机器特点:

本机将扁铝丝自动紧固在闭口金属拉链,成型后下止整齐,无伤痕,操作简单,速度快.

Machine features:

This machine automatically fastens the flat aluminum wire on the closed metal zipper, and after forming, the bottom stop is neat, without scars, and the operation is simple and fast.

全自动尼龙上止机(铝丝)

Full automatic metal upper stop machine (aluminum wire)


型号:	ITEM NO:	[X-2006]
功率:	POWER:	0.50KW
注射速度:	SPEED:	1800pcs/H,拉链长60mm
电压:	VOLTAGE:	220V
机器重量:	MACHINE Weight:	100Kgs
机器尺寸:	MACHINE SIZE:	1.50*0.70*1.85m
装箱尺寸:	Packaging Size:	0.70*0.70*1.40m

机器特点:

本机将扁铝丝自动紧固在开口或闭口尼龙拉链,成型后上止整齐,无伤痕,操作简单,速度快.

Machine features:


This machine automatically fastens the flat aluminum wire on the open or closed nylon zipper. After forming, the upper stop is neat, without scars, and the operation is simple and fast.



铝丝前码
Aluminum wire front size



全自动金属上止机(铝丝)
Full automatic metal upper stop machine (aluminum wire)



拉头
Puller

全自动穿头机(各形状拉头)
automatic fancy slider wearing machine

全自动穿头机(各形状拉头)

automatic fancy slider wearing machine

型号:	ITEM NO:	[X-2018]-D
功率:	POWER:	0.75KW
注射速度:	SPEED:	1600pcs/H,拉链长60mm
电压:	VOLTAGE:	380V
机器重量:	MACHINE Weight:	245Kgs
机器尺寸:	MACHINE SIZE:	1.40*0.55*1.75m
装箱尺寸:	Packaging Size:	0.75*0.60*1.60m

机器特点:

本机能将不同形状的拉头套入开口或闭口拉链中,全程自动,操作方便,自动检测故障,工作稳定,节省劳动力,提高效率.

Machine features:

This machine can cover the pull heads of different shapes into the open or closed zippers. It is automatic in the whole process, convenient in operation, automatic in fault detection, stable in work, labor saving and efficiency improving.

全自动金属上止机(U型)

Full automatic metal upper stop (U type)


型号:	ITEM NO:	[X-2022]
功率:	POWER:	0.75KW
注射速度:	SPEED:	1600pcs/H,拉链长60mm
电压:	VOLTAGE:	380V
机器重量:	MACHINE Weight:	245Kgs
机器尺寸:	MACHINE SIZE:	1.50*0.60*1.85m
装箱尺寸:	Packaging Size:	0.70*0.70*1.60m

机器特点:

本机将U型金属上止粒自动紧固在开口或闭口金属拉链,成型后上止整齐,美观,大气,高端金属拉链首选.

Machine features:


This machine automatically fastens the U-shaped metal upper stop on the open or closed metal zipper. After forming, the upper stop is neat, beautiful and atmospheric. High end metal zippers are preferred.



金属前码
Metal front size



全自动金属上止机(U型)
Full automatic metal upper stop (U type)



拉头
Puller

全自动穿头机(普通拉头)
automatic normal slider wearing machine

全自动穿头机(普通拉头)

automatic normal slider wearing machine

型号:	ITEM NO:	[X-2018]
功率:	POWER:	0.75KW
注射速度:	SPEED:	1600pcs/H,拉链长60mm
电压:	VOLTAGE:	380V
机器重量:	MACHINE Weight:	245Kgs
机器尺寸:	MACHINE SIZE:	1.30*0.55*1.75m
装箱尺寸:	Packaging Size:	0.75*0.60*1.60m

机器特点:

本机适用普通拉头套入开口或闭口拉链中,工作速度快,全自动操作,自动检测故障,操作方便,节省劳动力,提高效率.

Machine features:

This machine is suitable for ordinary pullers to be sleeved into open or closed zippers, with fast working speed, fully automatic operation, automatic fault detection, convenient operation, labor saving and efficiency improvement.

普通开口切断机带机械手

Ordinary cutting machine with manipulator


型号:	ITEM NO:	[X-2005K-]
功率:	POWER:	0.75KW
注射速度:	SPEED:	1600pcs/H,拉链长60mm
电压:	VOLTAGE:	220V
机器重量:	MACHINE Weight:	245Kgs
机器尺寸:	MACHINE SIZE:	2.15*0.55*1.75m
装箱尺寸:	Packaging Size:	0.80*0.60*1.50m

机器特点:

本机采用机械手控制拉带速度,适用于各种形状的拉片通过模具,钩针定位,拉链切口平整,操作方便,提高效率.

Machine features:

The machine uses a manipulator to control the speed of the belt, which can be used for pulling pieces of various shapes through the mold, positioning the crochet, making the zipper cut smooth, easy to operate, and improving the efficiency.



闭口切断
Closed shut-off



普通切断机带机械手
Ordinary cutting machine with manipulator



超声波切断机带机械手
Ultrasonic cutter with manipulator



闭口切断

超声波开口切断机带机械手 Ultrasonic cutter with manipulator

型号:	ITEM NO:	JX-2005K-C
功率:	POWER:	0.75KW
注射速度:	SPEED:	1600pcs/H,拉链长60mm
电压:	VOLTAGE:	380V
机器重量:	MACHINE Weight:	245Kgs
机器尺寸:	MACHINE SIZE:	2.15*0.85*1.90m
装箱尺寸:	Packaging Size:	1.00*0.70*1.70m

机器特点:
本机采用机械手控制拉带速度,超声波热熔原理来切断,切口平整,不起边,结合处牢固,可以适用于各种形状的拉片通过模具,钩针定位,拉链切口平整,操作方便,提高效率

Machine features:
This machine uses a manipulator to control the speed of the belt, and the ultrasonic hot melting principle to cut. The cut is flat, without edges, and the joint is firm. It can be used for pulling pieces of various shapes through the mold, crochet positioning, zipper cut is flat, easy to operate, and improve efficiency.

塑钢闭口拉链成品 规格:#3~#20

Finished plastic steel closed zipper
Specification: # 3-# 20



塑钢开口拉链成品 规格:#3~#20

Finished plastic steel zipper
Specification: # 3-# 20



塑钢双开拉链成品 规格:#3~#20

Plastic steel double zipper finished product
Specification: # 3-# 20




塑钢码装拉链贴金属膜 规格:#3~#20

Plastic steel zipper with metal film
Specification: # 3-# 20



塑钢码装拉链贴防水膜 规格:#3~#20

Plastic steel zipper with waterproof membrane
Specification: # 3-# 20

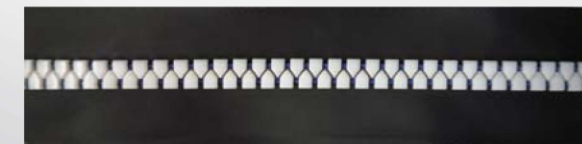

普通闭口拉链切断机
Ordinary closed cutting machine



闭口切断

普通闭口切断机 Ordinary closed cutting machine

型号:	ITEM NO:	JX-2005B
功率:	POWER:	0.75KW
注射速度:	SPEED:	1600pcs/H,拉链长60mm
电压:	VOLTAGE:	220V
机器重量:	MACHINE Weight:	245Kgs
机器尺寸:	MACHINE SIZE:	1.80*0.55*1.75m
装箱尺寸:	Packaging Size:	0.90*0.70*1.50m

机器特点:
本机采用步进电机控制拉带速度,钩针定位,保证拉链质量,节省操作空间,提高工人效率

Machine features:
The machine adopts a stepping motor to control the belt pulling speed, and the crochet needle is positioned to ensure the zipper quality, save operation space, and improve the worker's efficiency.